


# NESCHEN COLDLAM 1650 SW

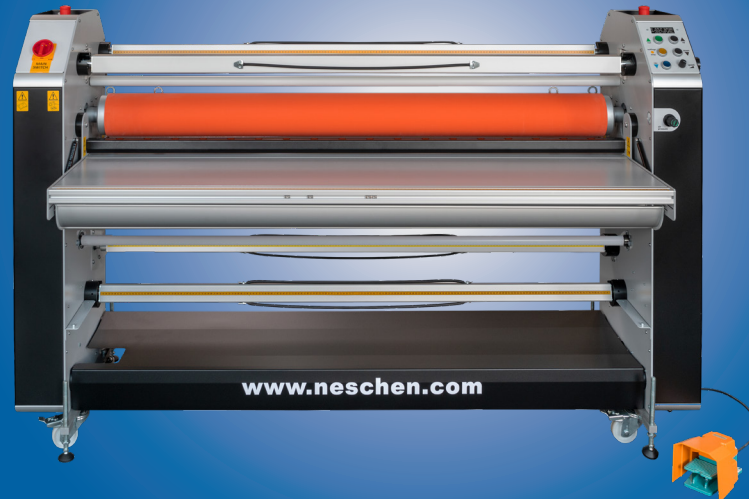

## PRODUCT FEATURES

- Integrated compressor for consistent pressure
- Heat assist through heatable top roller temperature
- Large rollers with optimum pressure distribution
- Externally located brake and clutch handles
- Swing out shafts
- Sturdy adjustable feet for safe working
- Durable and robust construction
- Safety foot pedal
- Levelling feet
- 2 windup shafts for roll-to-roll-application (1 as a swing out)
- 2 unwind shafts (1 as a swing out)

## SPECIFICATIONS

<b>Processing width</b>	max. 1650 mm
<b>Processing speed</b>	0 - max. 8 m/Min.
<b>Roller Coating</b>	EPDM
<b>Main rollers diameter</b>	140 mm
<b>Roller Nip</b>	max. 40 mm
<b>Top roller heat assistance</b>	max. 70 °C
<b>Hardness and shape of rollers</b>	65 shore, top cylindrical, bottom crowned
<b>Main rollers max pressure</b>	1,6 N/mm pressure reg. 0 - 4 bar with internal compressor
<b>Measurements H/W/D</b>	1320 / 2175 / 650 mm
<b>Weight</b>	490 kg net.
<b>Electrical requirements</b>	1N/PE 230VAC/50Hz-60Hz; 1700W; 8A



01/24

For more information visit [www.neschen.com](http://www.neschen.com)

