PRICE LIST SEK 2018.01

ROLL-X



Multipurpose applicator

APPLICATION AREAS



ONE OPERATOR CAN MOUNT LARGE FORMAT

digital print and self-adhesive film to many substrates like acrylic, rigid boards, corrugated plastic, metal plate, banners and glass.

The flatbed gives you complete control over positioning and produces a result free from bubbles and creases.



DESIGNED FOR COLD FLATBED LAMINATION

of digital prints and signs, by using pressure sensitive lamination film direct from roll or sheet by sheet for minimum waste.



PRE-MASKING


IT ENABLES A SINGLE PERSON TO APPLY

transfer tape to cut vinyl graphics from the built in tape roll holder.



YOU NEED NO FURTHER CUTTING TABLE

ROLL-X® will become your new work table with a unique self-healing cutting mat, metal side lines used for trimming, height adjustable legs and adjustable/removable side trays.

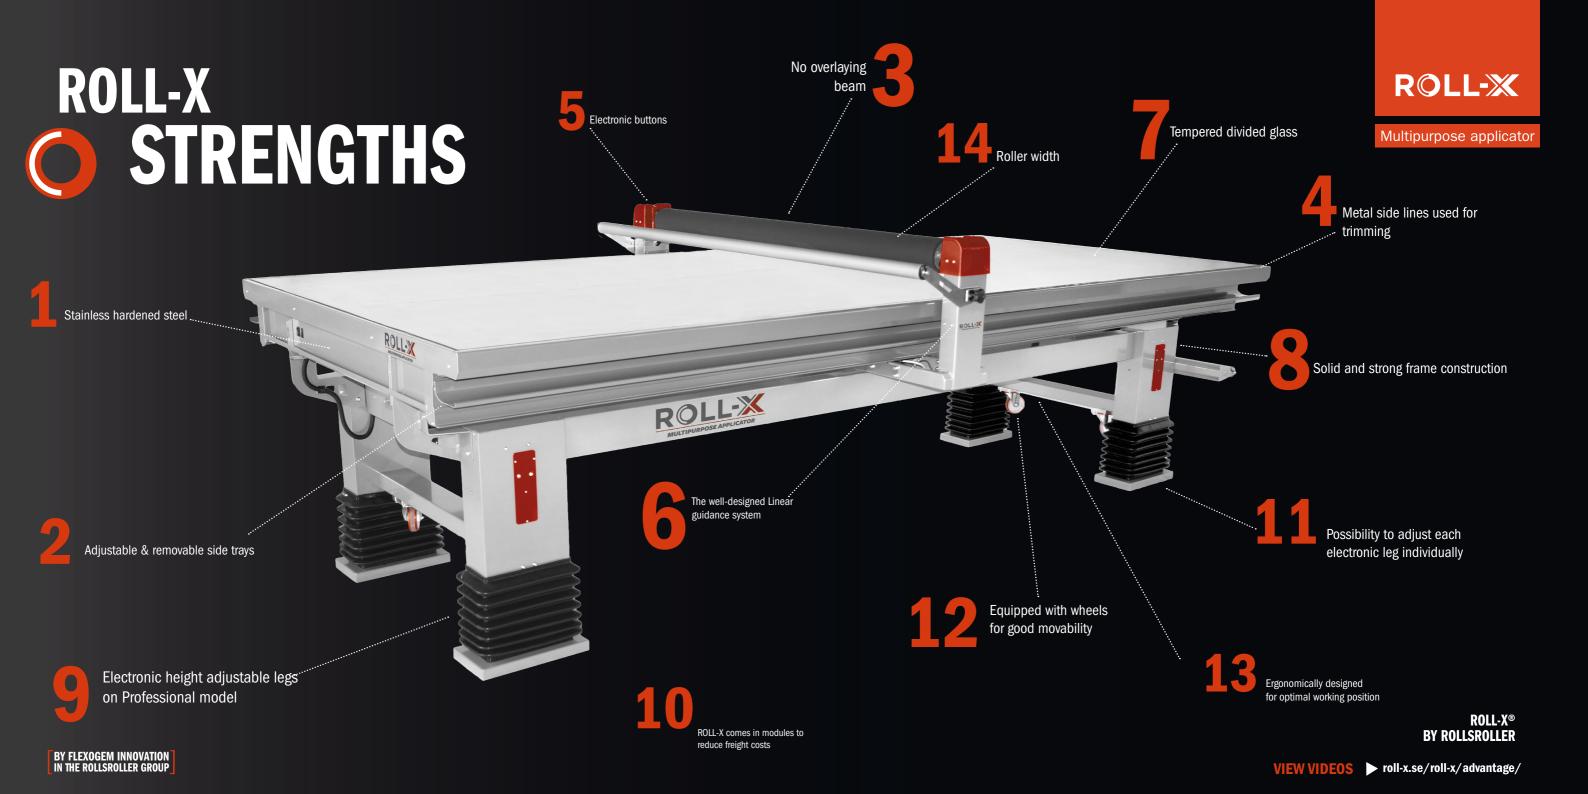

ROLL-X®



ROLL-X® GO is a brand new product and gives you access to the superior production method provided by the Flatbed Applicator technique. The machine can either be shipped in modules to reduce shipping cost and gives you the possibility to fit through a standard door, or be delivered fully assembled. The assembling is fast and easy and you will start making money in no time! Possible to retrofit LED, Gas damper for tilt function and Fabric pocket on short side.

MODEL	327/175	400/175	470/175
Model type	GO	GO	GO
Part no.	10564	10565	10566
Bed length	3 270 mm / 10ft. 9in.	4 000 mm / 13ft. 1in.	4 700 mm / 15ft. 5in.
Bed width	1 750 mm / 5ft. 9in.	1 750 mm / 5ft. 9in.	1 750 mm / 5ft. 9in.
Length of working area	2 870 mm / 9ft. 5in.	3 600 mm / 11ft. 10in.	4 300 mm / 14ft. 1in.
Width of working area/roller width	1 650 mm / 5ft. 5in.	1 650 mm / 5ft. 5in.	1 650 mm / 5ft. 5in.
Work height flatbed	800-1 000mm / 2ft. 7in – 3ft. 3in.	800-1 000mm / 2ft. 7in – 3ft. 3in.	800-1 000mm / 2ft. 9in - 3ft. 3in.
Max. thickness of substrate	85 mm / 3 2/5in.	85 mm / 3 2/5in.	85 mm / 3 2/5in.
Bed surface	tempered glass + cutting mat	tempered glass + cutting mat	tempered glass + cutting mat
Height-adjustable table	Adjustable	Adjustable	Adjustable
Illumination	option	option	option
Roll holder, glide beam	yes	yes	yes
Roll holder, short side	yes	yes	yes
Casters	yes	yes	yes
Warranty	2 years	2 years	2 years
Price	99 000 kr	109 000 kr	125 000 kr

OPTIONS TO IMPROVE YOUR ROLL-X®

PRODUCT			
Illumination	8 000 kr	8 000 kr	8 000 kr
Flatbed tilt, gas dampers	8 000 kr	8 000 kr	8 000 kr
Roll cradle 1 300 mm / 4ft. 3in.	1 495 kr	1 495 kr	1 495 kr
Fabric pocket, short side	2 500 kr	2 500 kr	2 500 kr
Assembled when delivered*	10 000 kr	10 000 kr	10 000 kr

^{*} Ex Factory

ROLL-X® PROFESSIONAL



ROLL-X® PROFESSIONAL is the fully equipped multipurpose work table that gives you access to the superior production method provided by the Flatbed Applicator technique. The machine can either be shipped in modules to reduce shipping cost and gives you the possibility to fit through a standard door, or be delivered fully assembled. The assembling is fast and easy and you will start making money in no time! ROLL-X® Professional is equipped LED and electrical height adjustment.

MODEL	327/175	400/175	470/175
Model type	Professional	Professional	Professional
Part no.	10534	10535	10536
Bed length	3 270 mm / 10ft. 9in.	4 000 mm / 13ft. 1in.	4 700 mm / 15ft. 5in.
Bed width	1 750 mm / 5ft. 9in.	1 750 mm / 5ft. 9in.	1 750 mm / 5ft. 9in.
Length of working area	2 870 mm / 9ft. 5in.	3 600 mm / 11ft. 10in.	4 300 mm / 14ft. 1in.
Width of working area/roller width	1 650 mm / 5ft. 5in.	1 650 mm / 5ft. 5in.	1 650 mm / 5ft. 5in.
Work height flatbed	850-1 070mm / 2ft. 9in – 3ft. 6in.	850-1 070mm / 2ft. 9in – 3ft. 6in.	850-1 070mm / 2ft. 9in – 3ft. 6in.
Max. thickness of substrate	85 mm / 3 2/5in.	85 mm / 3 2/5in.	85 mm / 3 2/5in.
Bed surface	tempered glass + cutting mat	tempered glass + cutting mat	tempered glass + cutting mat
Height-adjustable table	electrical	electrical	electrical
Illumination	yes	yes	yes
Roll holder, glide beam	yes	yes	yes
Roll holder, short side	yes	yes	yes
Casters	yes	yes	yes
Warranty	2 years	2 years	2 years
Price	130 000 kr	140 000 kr	150 000 kr

OPTIONS TO IMPROVE YOUR ROLL-X®®

PRODUCT			
Illumination	included	included	included
Electrical height adjustment	included	included	included
Roll cradle 1 300 mm / 4ft. 3in.	included	included	included
Assembled when delivered*	10 000 kr	10 000 kr	10 000 kr

^{*} Ex Factory

ROLL-X®ACCESSORIES

IT'S EASY TO UPGRADE YOUR ROLL-X®

Great accessories to improve and modify your ROLL-X® Multipurpose Applicator. To make your job even easier, choose between many original accessories to improve your daily work.











ROLL-X® RRX compressor

Stop static kit, cord and magnet

Long reach cutter

Roll cradle

PRODUCT NAME	DESCRIPTION/DIMENSIONS	PRICE
ROLL-X® long life compressor	Voltage 230V/50Hz / 120V/60Hz / Volume: 6 Liter / Dim 48 x 34,5 x 42cm 19,7Kg	7 200 kr
ROLL-X® RRX compressor	Voltage 220V/50Hz	7 200 kr
ROLL-X® RRX compressor	Voltage 120V/60Hz	7 200 kr
Stop static kit	Used to reduce static electricity. Includes 1 m cord and 1 magnet	400 kr
Long reach cutter 60	Length 600 mm / 1ft 1in. Extra titan blades 10pcs are included.	680 kr
Long reach cutter 90	Length 900 mm / 2ft 2in. Extra titan blades 10pcs are included	780 kr
Roll cradle	Width: 1300mm / 4ft 3in	1 495 kr

SELF-HEALING CUTTING MATS	DESCRIPTION/DIMENSIONS	PRICE
Cutting mat 327/175	3270 x 1680 mm / 9ft. 2in. x 4ft. 9in.	3 680 kr
Cutting mat 400/175	4000 x 1680 mm / 13ft. 1in. x 4ft. 9in.	4 500 kr
Cutting mat 470/175	4700 x 1680 mm / 15ft. 5in. x 4ft. 9in	5 290 kr

INCREASE YOUR PROFITS

- No re-makes
- Consistent high quality
- Great time savings
- Ergonomic and easy to use, does not require specialized operator.



CALCULATE YOUR ROI

WANT TO SEE HOW MUCH TIME AND MO-**NEY YOU CAN SAVE?**

The ROLL-X® ROI Calculator easily calculates how much you earn on replacing your traditional approach to the unique ROLL-X® Flatbed Applicator method. Can you afford not to? Please visit roll-x.se for more information and to calculate your profit.

roll-x.se/calculator

SELECTED PRODUCTS

ROLL-X® SELECTED PRODUCTS will make your daily sign production easier and more effecient. Based on many years of experience from the sign industry they are developed and selected to meet the future. YOULIFTER® & EXC™ is now avaliable at your nearest ROLL-X® dealer.









EXC™ EXCENTER CUTTERMAKES IT POSSIBLE TO ALWAYS CUT STRAIGH





EXC™ FLEX
MOUNT TO YOUR ROLLSROLLER, USE AS A MOVABLE
CUTTING DEVICE OR AS A STANDARD EXC CUTTER





EXCTM EXCENTER CUTTER

EXCENTER CUTTER (EXC) WITH DOUBLE SHOCK SYSTEM AND BACK STOP FUNCTION

The NEW Excenter Cutter is a cutting devise that makes it possible to always cut straight. The EXC™ is constructed and designed to perfection. The light weight makes it very easy to handle and use. Adjustable knife pressure setting, twin oil shocks and blade back stop makes it possible to easily cut soft and hard materials.

MODEL NAME	EXC™ 150	EXC™ 230	EXC™ 330	EXC™ 430	EXC™ 530
Part no.	10543	10544	10545	10546	10547
Total length	1 740 mm / 5ft 9in.	2 540 mm / 8ft 4in.	3 540 mm / 11ft 7in.	4 540 mm / 14ft 11in.	5 540 mm / 18ft 2in.
Work length	1 500 mm / 4ft 11in.	2 300 mm / 7ft 7in.	3 300 mm / 10ft 10in.	4 300 mm / 14ft 1in.	5300 mm / 17ft 5in.
Cut dept	20 mm / 0,8 in.	20 mm / 0,8 in.	85 mm / 0,8 in	85 mm / 0,8 in.	85 mm / 0,8 in.
Weight	2,5 kg / 5.5 lb	3,3 kg / 7.3 lb	4,3 kg / 9.5 lb	5,3 kg / 11.7 lb	6,3 kg / 13.9 lb
Price	8 000 kr	8 500 kr	9 000 kr	9 500 kr	10 000 kr

KEY FEATURES

- Always straight cuts
- Adjustable knife pressure setting
- Twin oil shocks
- Blade back stop



THE EXCENTER CUTTER COMES WITH TH-**REE DIFFERENT CUTTING BLADES**

Straight blade -for harder material Half-hook blade -for softer material Hook blade -for soft material



EXCTM FLEX

THE EXC FLEX IS A UNIOUELY DESIGNED AND CONSTRUCTED CUTTING DEVICE FOR MAKING STRAIGHT CUTS in a variety of materils. It offers a great flexibility where the EXC Flex can be used as a movable cutting device, be mounted to your ROLL-X Multipurpose Applicator or be used as a standard EXC.

MODEL NAME	EXC® Flex 175
Part no.	10563
Total length	2 060 mm / 6ft 9.in
Cut length	1 750 mm / 5ft. 8.8in.
Attachement for ROLL-X	Yes, universal
Price	10 800 kr

KEY FEATURES

- Mount to your ROLL-X to create a fixed cutting station
- Can be used as a movable cutting device
- Can be used as a standard EXC Excenter Cutter
- Straight up/down movement of the cutting bar
- Quick release function to detach the ruler and cutting head












YOULIFTER® UNIVERSAL LIFTER

YOULIFTER® UNIVERSAL LIFTER DESIGNED TO HELP YOU WITH THE HEAVY WORK The Youlifter® is an electrical lifter constructed and developed to create a better working environment and better ergonomic which will increase your productivity. The lifter fits perfect in the graphical sign production but also in other industrial environments where lift support is needed. Youlifter® comes in three models: Youlifter® 120P, Youlifter® 90IE, Youlifter® 60E.

ELECTRICAL LIFTER. ERGONOMIC REDUCE STRAIN INJURIES. REMOTE CONTROL. EXCELLENT MANEUVERABILITY

MODEL NAME	YOULIFTER® Universal lifter 60E	YOULIFTER® Universal lifter 901E	YOULIFTER® Universal lifter 120P
Part no.	71911	71918	71919
Overall width	645 mm / 2ft 1in	645 mm / 2ft 1in	785 mm / 2ft 7in
Base width	498 mm / 1ft 7in	555 mm / 1ft 9in	733 mm / 2ft 5in
Height	1685 mm / 5ft 6in	1685 mm / 5ft 6in	1675 mm / 5ft 6in
Max. lifting height	1094 mm / 3ft 7in	1319 mm / 4ft 4in	1412 mm / 4ft 7in
Min. lifting height	120 mm / 5in	120 mm / 5in	120 mm / 5in
Max. load	60 kg / 132 lb	90 kg / 198 lb	120 kg / 264 lb
Dead weight	40 kg / 88 lb	40 kg / 88 lb	45 kg / 99 lb
Battery capacity	12 Ah	12 Ah	12 Ah
Charging voltage	230VAC/50Hz or 115VAC/60Hz	230VAC/50Hz or 115VAC/60Hz	230VAC/50Hz or 115VAC/60Hz
Lifting speed with max. load	1m/10 sec up. 1m/7 sec down ; 3ft 3in/10sec up. 3ft 3in/7 sec down	1m/10 sec up. 1m/7 sec down ; 3ft 3in/10sec up. 3ft 3in/7 sec down	1m/10 sec up. 1m/7 sec down ; 3ft 3in/10sec up. 3ft 3in/7 sec down
Price	22 050 kr	25 650 kr	35 550 kr









YOULIFTER® 60E UNIVERSAL LIFTER



E-ECO

The E-Trolley is our smallest lifter, offering a very swift and flexible lifting trolley. The lifting capacity of this lifter is max. 60 kg / 132 lb. To ensure maximal safety the trolleys possess a built-in release function, which serves as protection from crushing injuries and prevents the trolley from tipping

The tray design makes it possible to load/unload material from printers and is perfect for scooping up heavy material from your flatbed applicator.



YOULIFTER® 90IE UNIVERSAL LIFTER



IE-INDUSTRIAL ECO

The IE-trolley is our medium-sized lifter. A great compromise between the strong P-trolleys and the sleek E-trolleys. They're stable with a fully welded chassis, but are still "almost" as slim as our E-trolleys. They are capable of lifting up to max: 90 kg / 198 lb. To ensure maximal safety the trolleys possess a built-in release function, which serves as protection from crushing injuries and prevents the trolley from tipping over. The tray design makes it possible to load/unload material from printers and is perfect for scooping up heavy material from your flatbed applicator.







YOULIFTER® 120P UNIVERSAL LIFTER



P-PROFESSIONAL

The P-trolleys are the largest, most stable, powerful and flexible in the family. The trolleys are modular and easy to assemble. They are capable of lifting up to 120 kg / 264 lb. To ensure maximal safety the trolleys possess a built-in release function, which serves as protection from crushing injuries and prevents the trolley from tipping over.

The tray design makes it possible to load/unload material from printers and is perfect for scooping up heavy material from your flatbed applicator.



ROLL-X® VinylRemover



THE ROLL-X° VINYLREMOVER IS CAPABLE OF STRIPPING AWAY ANY FILM FROM YOUR CUTTING PLOTTER OR PRINT'N CUT. It

is designed for easy mounting on your ROLL-X° and you can even use it on a portable table stand. It's operated with a single hand driven crank and gets the job done in no time. You can even pause in the middle of a job to attend other business and finish the job later. Including magnet adaptor for easy mounting on your ROLL-X°.

MODEL NAME	ROLL-X° VinylRemover VR15-170
Part no.	71854
Working width	1 700 mm / 5ft. 7in.
Price	16 155 kr

Table Stand kit to be mounted on your ROLL-X* VinylRemover. For easy move between tables. Fits all VR15 sizes.

MODEL NAME	ADOPTOR 170
Part no.	7187
Price	3 250 kr
MODEL NAME	MEDIA ROLLER 170
MODEL NAME Part no.	MEDIA ROLLER 170 71874





A ROLLER TABLE ST

Media Roller kit for easy mounting on the back of your ROLL-X* VinylRemover. Suitable for larger jobs from roll. From your plotter or printer.

MODEL NAME	TABLE STAND
Part no.	71872
Price	2 150 kr





► VIEW VIDEOS: roll-x.se/roll-x/advantage/



YOULIFTER® UNIVERSAL LIFTER

DESIGNED TO HELP YOU WITH THE HEAVY WORK

► VIEW VIDEO: roll-x.se/youlifter/explore-youlifter/



► VIEW VIDEO: roll-x.se/exc/explore-exc/

ROLL-X® IS A MONEY MAKER

WANT TO SEE HOW MUCH TIME AND MONEY YOU CAN SAVE?

While getting access to a technology that will revolutionize your entire work process? The ROLL-X® ROI Calculator easily calculates how much you earn on replacing your traditional approach to the unique ROLL-X® Flatbed Applicator method. How much foil and premask do you use? How much time do you spend per application? What is the total labour cost? Fill in your values and discover how fast your return on investment will be.

THE QUESTION IS CAN YOU AFFORD NOT TO?





roll-x.se/calculator

GENERAL INFORMATION

REQUIREMENTS:

ROLL-X® Multipurpose Applicator requires air supply of 2,5 bar / 36 psi / 0,25 MPa pressure, 230 volt/50 Hz electrical supply (available as US model 120 volt/60Hz)

DELIVERY

ROLL-X® is delivered in parts as standard. Assembled from factory is optional.

ASSEMBLY

If delivered in parts: follow the ROLL-X® installation manual included in the package.

If delivered fully assembled: lift the machine off the pallet, connect it to a power supply and follow instructions in the Owner's manual.

WARRANTY:

2 years warranty, exluding glass and electrical parts. Visit our website www.roll-x.se and download complete conditions.

OFFLOADING INSTRUCTIONS:

ROLL-X® requires a forklift.

If delivered in parts: Crate is 710 mm / 2ft. 4in. wide (normal lenght is enough).

If delivered fully assembled: Crate is 2000 mm / 6ft. 7in. wide and we here recommend forks at least 1 700 mm / 5ft. 7in. long and sufficient capacity to lift the full weight of the ROLL-X® model.

Lift the ROLL-X® under the steel frame (see user manual)

ANY QUESTIONS?

Contact Induex AB if there are any hesitations or questions!

+46 54 770 70 30 info@roll-x.se





HEADQUARTERS

ROLL-X®. Induflex AB Frögatan 3 SE 653 43 Karlstad, SWEDEN Phone: +46 54 770 70 30

NORTH AMERICAN SALES OFFICE:

ROLLSROLLER Enterprise 6345 Netherhart Rd, Unit 1 Mississauga, Ontario L5T 1B8 Canada Office Phone; 905-670-3130

HONG KONG SALES OFFICE:

ROLLSROLLER Asia Ltd. 1902-5, 19/F Sunlight Tower 248 Queen´s Rd East Wanchai Phone: +852 3184 0456 Hong Kong

> E-mail: info@roll-x.se E-mail: order@roll-x.se Web: www.roll-x.se



BY FLEXOGEM INNOVATION IN THE ROLLSROLLER GROUP



